

HS-6510W/6512W/6514W



Specification	HS-6510W	HS-6512W	HS-6514W
Processor	Intel Skylake Core i3-6100U, 2.30 GHz, 3M Cache; Intel Kaby Lake Core i3-7100U, 2.40 GHz, 3M Cache; Intel Kaby Lake Core i5-7200U, 2.50 GHz, 3M Cache		
System Memory	DDR4 SO-DIMM slot x 1, max 16 GB		
Storage Device	SATA x 1		
Power Supply	24V/100W		
Built-in Printer	3" detachable printer w/ auto cutter, 250 mm/sec (max.)		
Built-in WiFi	N/A		
OS Support	Windows 7/POSReady 7/Windows Embedded 8.1 Industry 64 bit/Windows 10 IoT 64 bit/ Linux per request for Skylake processor Windows 10 IoT 64 bit for Kaby Lake processor		
Display & Touch			
LCD	9.7" TFT LCD	12" TFT LCD	14" TFT LCD
Resolution	1024 x 768	1024 x 768	1366 x 768
Touch	True-flat PCAP touch with multi-touch support (IP65 on front panel)		
I/O & Expansion			
Serial Port	3, DB9 x 2 + RJ45 x 1, 5V/12V support on all COM ports		
Parallel Port	Yes		
Standard USB Port	4, USB 3.0 x 1 + USB 2.0 x 3		
OTG USB	N/A		
LAN Port	10/100/1000 Mb x 1		
Display Port	VGA x 1, 12V support for Posiflex monitors		
CR Port	1, control 2 CR via optional Y-cable (printer driven), supporting 24V cash drawer		
PS/2 Port	Yes		
Audio	Line-out x 1		
Expansion Slot	M.2 slot x 1		
Physical Dimension			
Dimension (W x D x H in mm)	244.5 x 198 x 434	297 x 198 x 473	371.5 x 198 x 473
Weight (N. W. in kg)	4.2	5.3	6
Environmental			
Operating Condition	0°C - 40°C, 20%RH - 90%RH (Equipped with HDD); 0°C - 50°C, 20%RH - 90%RH (Equipped with SSD)		
Storage Condition	-20°C - 70°C, 10%RH - 90%RH		
Built-in Options			
WiFi	M.2 WiFi/BT module		
MSR	3 tracks ISO or JISII (HID/VCOM selection)		
Fingerprint Sensor	Optical type		
RFID Reader	Support MIFARE Ultralight and Classic 1K card (HID/VCOM Selectable)		
Scanner	2D barcode scanner		
iButton	Yes (cannot coexist with Fingerprint Sensor)		
4G / LTE Communication	Single SIM slot, selected band support		
Attachment Options			
POS Monitor	Non-touch TFT LCD: 7"/9.7"/12.1"; PCAP touch TFT LCD: 9.7"		
Line Display	2 x 20 rear-mount VFD customer line display; 2 x 20 rear-mount LCD customer line display; 7" color LCD graphical line display		

*Designed and Manufactured in Taiwan by Posiflex Technology, Inc.*The product information and specifications are subject to change without prior notice.
*Please refer to the website for more attachment options.



POSIFLEX TECHNOLOGY, INC.
No. 23, Datong St., Tucheng Dist., New Taipei City 23679, Taiwan
Tel : +886-2-2268-5577 E-mail : sales@posiflex.com.tw
Fax : +886-2-2268-5388 www.posiflex.com

Authorized Distributor / Reseller



Taking Space Saving to Extremes


HS-6510W/6512W/6514W

Space Saving All-in-one POS Terminal

HS-6510W/6512W/6514W

POSIFLEX

The **HS-6500 Series** is the new high-end all-in-one POS terminal that runs on Intel processor up to Kaby Lake Core i5. It packs innovativeness and functionality in compact design with stylish look, which is ideal for retail businesses where space is at premium.

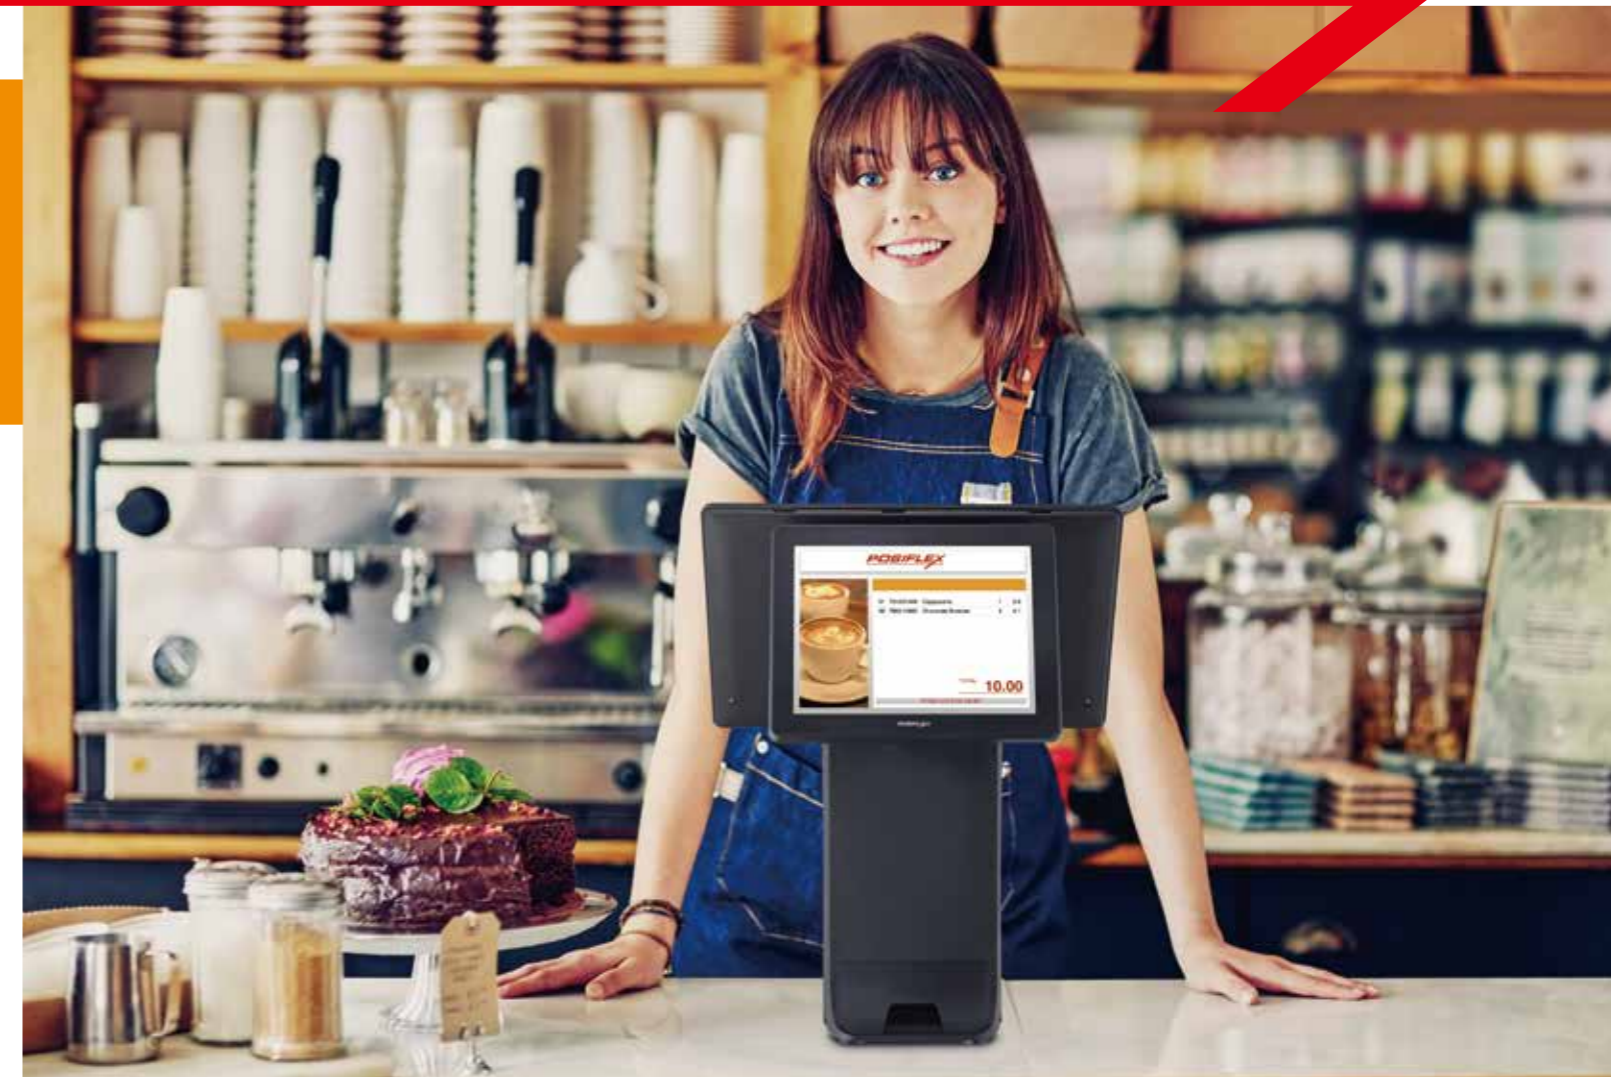

Innovative All-in-one Terminal

This compact all-in-one 10"/12"/14" touch POS comes with a detachable receipt printer for easy maintenance. Add an optional 2D barcode scanner while the printer is on board, making the HS-6500 Series the most well-rounded all-in-one POS terminal in the market.

Integrated Design with Advanced Manageability

The HS-6500 Series integrates the most widely used peripherals including 3" thermal printer, MSR, fingerprint sensor, 2D barcode scanner and 2nd customer display to support your daily POS operation. The detachable modularized design allows quick access to the components, enabling fast and easy service and upgrades.



Detachable Receipt Printer

Aesthetics

Dressed from head to toe in timeless black or white color, the only trend that never goes out of style, and with stylish touches added throughout, the HS-6500 Series is not just a piece of machinery, it is an elegantly crafted piece of art that looks right at home in any store decoration.



2D Barcode Scanner



Optional Built-in MSR
Fingerprint Sensor
and RFID Reader