

# Sharp BP-51C26


A smart A3 colour MFP with multi-layered security features and advanced environmental credentials, perfect for any modern office.



- 26ppm A3 colour MFP with seamless integration and connection to cloud based business process applications
- Multi-layered security features include automatic BIOS recovery if anomalies are detected during start-up and standard Trusted Platform Module to keep your confidential data secure
- Collaborate with ease using the Microsoft® Teams connector to print from or scan to your Microsoft® Teams channels directly from the MFP control panel<sup>[1]</sup>
- Keep your data, device and network secure with optional Bitdefender anti-malware protection software<sup>[2]</sup>
- Bring more flexibility to your print output with an extensive range of finishing options including stapling, punching and folding
- A sustainable design uses up to 50% recycled plastics in manufacturing the base unit of the MFP and cardboard packaging helps reduces plastic waste
- 100-sheet Reversing Single Pass Feeder scans one or two-sided originals at speeds of up to 80ipm for completing large jobs with ease and efficiency
- Advanced eco-technologies deliver an impressively low TEC value and standby power consumption rate
- With support for Microsoft Entra ID you can manage identities and control device access via a secure cloud-based tool
- Intuitive icons and a smartphone style interface on the 10.1-inch colour LCD control panel make operating the MFP smooth and easy
- Single sign-on lets you securely print from or scan to public cloud storage services quickly and easily
- Keep up-to-date and compliant with automatic online firmware and application updates via the Sharp Application Portal


[1] Microsoft® Teams connector requires BP-AM10., [2] Bitdefender anti-malware protection software requires BP-VD10.

## Configurations

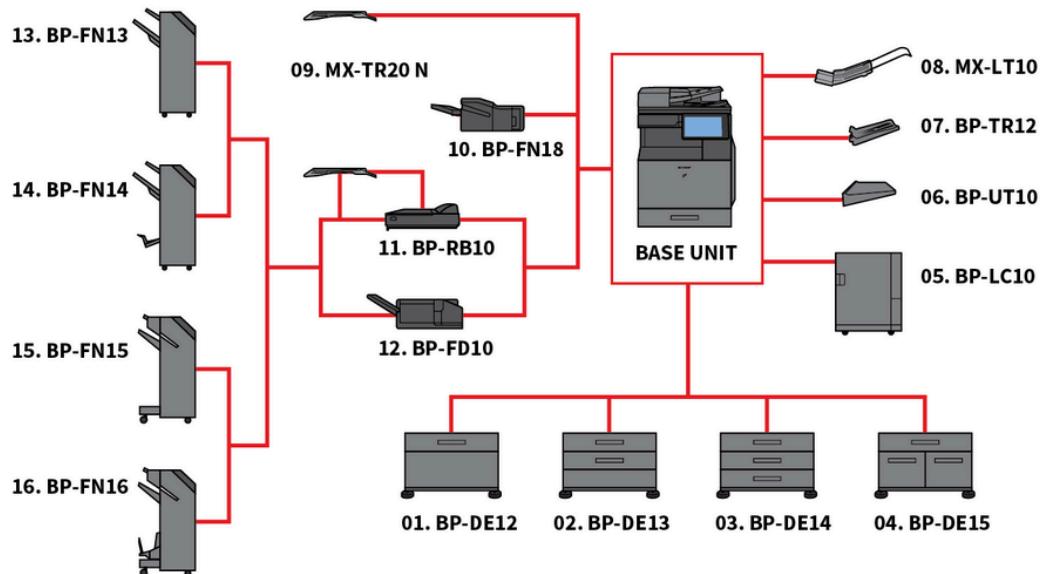

Configurations may differ per sales region. Please contact your local Sharp representative for further information.

## Dimensions

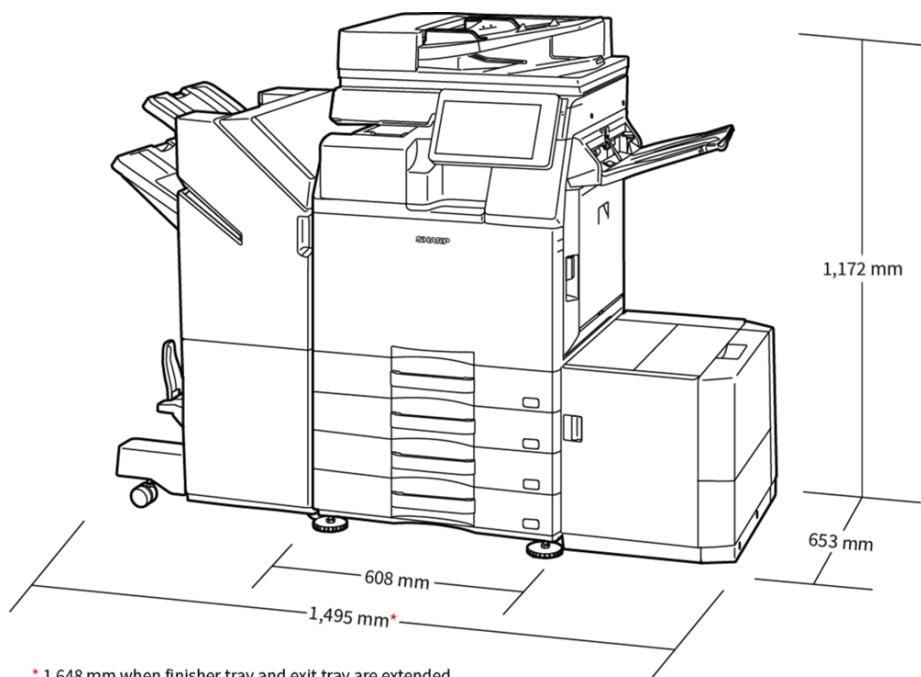

Dimensions are shown with optional equipment. Options may differ per region.

# Options

## Sharp OSA

### BP-AM10 Application Communication Module

[empty]

### BP-AM11 External Account Module

[empty]

### MX-AMX1 Application Integration Module

[empty]

## Base Unit

### BP-DE12 Stand with 550-sheet Paper Drawer

550 sheets (based on 80 g/m<sup>2</sup>), SRA3-A5R (60-300 g/m<sup>2</sup>)

### BP-DE13 Stand with 2 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m<sup>2</sup>), SRA3-A5R (60-300 g/m<sup>2</sup>)

### BP-DE14 Stand with 3 x 550-sheet Paper Drawers

550 sheets each for lower and upper trays (based on 80 g/m<sup>2</sup>), SRA3-A5R (60-300 g/m<sup>2</sup>)

### BP-DE15 Stand with 550 + 2100-sheet Paper Drawers

Upper tray: SRA3-A5R, 550 sheets\* (60-300 g/m<sup>2</sup>); Lower tray (Left): A4, 1,200 sheets\* (60-105 g/m<sup>2</sup>); Lower tray (Right): A4 - B5, 900 sheets\* (60-105 g/m<sup>2</sup>); \* Number of sheets based on 80 g/m<sup>2</sup>

### BP-LC10 Large Capacity Tray

3,000 sheets (based on 80 g/m<sup>2</sup>), A4-B5 (60-220 g/m<sup>2</sup>)

### BP-UT10 Utility Table

[empty]

## Finishing

### BP-FD10 Folding Unit

200 sheets (based on 80 g/m<sup>2</sup>), A3, B4, A4R (Z-fold, half fold), A3, A4R (C-Fold, Accordion fold), 60-256 g/m<sup>2</sup>

### BP-FN13 1k Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Requires BP-RB10 Paper Pass Unit

### BP-FN14 1k Saddle Stitch Finisher

A3W-A5R (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 1,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 50-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Saddle stitch tray (lower): 7 sets (11-15 sheets), 10 sets (6-10 sheets), 20 sets (1-5 sheets), 15 sheets max per set; Requires BP-RB10 Paper Pass Unit

### BP-FN15 3k Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m<sup>2</sup>), 40 sheets (80 g/m<sup>2</sup>); Stapleless capacity: max. 10-sheet (64 g/m<sup>2</sup>), 8 sheet (65 - 81.4 g/m<sup>2</sup>), 6 sheet (81.5 - 105 g/m<sup>2</sup>); Requires BP-RB10 Paper Pass Unit

### BP-FN18 Inner Finisher

A3 - B5 (offset/staple), SRA3 - A5R (non offset); Offset tray (upper): max. 500-sheet paper capacity; Stapling capacity: max. 50-sheet multi-position staple\*; Manual Stapling: 1-point at rear (Flat), 45 sheet (64 g/m<sup>2</sup>), 40 sheets (80 g/m<sup>2</sup>); Stapleless capacity: max.10-sheet (64 g/m<sup>2</sup>), 8 sheet (65 - 81.4 g/m<sup>2</sup>), 6 sheet (81.5 - 105 g/m<sup>2</sup>)

### BP-RB10 Paper Pass Unit

Required when using BP-FN13, BP-FN14, BP-FN15 or BP-FN16

### BP-TR12 Exit Tray Unit

[empty]

### MX-LT10 Long Paper Feeding Tray

Recommended for banner printing

### MX-PN14C Punch Module - 2/4 Hole

Punch module for BP-FN11/BP-FN12

### MX-PN14D Punch Module - 4 Hole Wide

Punch module for BP-FN11/BP-FN12

### MX-PN15C Punch Module - 2/4 Hole

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

### MX-PN15D Punch Module - 4 Hole Wide

Punch module for BP-FN13/BP-FN14/MX-FN28/MX-FN29

### MX-PN16C Punch Module - 2/4 Hole

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

### MX-PN16D Punch Module - 4 Hole Wide

Punch module for BP-FN15/BP-FN16/MX-FN30/MX-FN31/MX-FN34/MX-FN35

### BP-FN16 3k Saddle Stitch Finisher

A3-B5 (offset/staple), SRA3-A5R (non offset); Offset tray (upper): max. 3,000-sheet paper capacity (based on 80 g/m<sup>2</sup>); Stapling capacity: max. 65-sheet multi-position staple (based on 80 g/m<sup>2</sup>); Manual Stapling: 1-point at rear (Flat), 45 sheets (64 g/m<sup>2</sup>), 40 sheets (80 g/m<sup>2</sup>); Stapleless capacity: max. 10-sheet (64 g/m<sup>2</sup>), 8 sheet (65 - 81.4 g/m<sup>2</sup>), 6 sheet (81.5 - 105 g/m<sup>2</sup>); Saddle stitch tray (lower): 10 sets (11-20 sheets), 15 sets (6-10 sheets), 25 sets (1-5 sheets), 20 sheets max per set; Requires BP-RB10 Paper Pass Unit

## Security

### BP-FR12U Data Security Kit

Commercial version

### BP-VD10 Virus Detection Kit

[empty]

## Storage

### BP-SD10 High Capacity SSD

512GB SSD

## Scanning

### MX-EB19 Enhanced Compression Kit

Enables creation of high compression PDFs.

### MX-EB20 OCR Expansion Kit

Convert scanned documents into editable Microsoft® Office files and searchable PDFs via Optical Character Recognition (OCR). Essential MFPs only

## Faxing

### MX-FWX1 Internet Fax Expansion Kit

[empty]

## Printing

### MX-PF10 Barcode Font Kit

Enables barcode printing

### MX-PU10 Direct Print Expansion Kit

Direct print Microsoft® Office files from USB drives. Essential MFPs only.

# Specifications

## General

|  |      |
|--|------|
| <b>Engine speed: A4 Colour (ppm)</b>           | 26   |
| <b>Engine speed: A4 B/W (ppm)</b>              | 26   |
| <b>Engine speed: A3 Colour (ppm)</b>           | 15   |
| <b>Engine speed: A3 B/W (ppm)</b>              | 15   |
| <b>Paper size: Min.</b>                        | A6R  |
| <b>Paper size: Max.</b>                        | SRA3 |
| <b>Paper weight: Min. (g/m<sup>2</sup>)</b>    | 52   |
| <b>Paper weight: Max. (g/m<sup>2</sup>)</b>    | 300  |
| <b>Paper capacity: Std. (sheets)</b>           | 650  |
| <b>Paper capacity: Max. (sheets)</b>           | 6300 |
| <b>Warm-up time (sec.)</b>                     | 16   |
| <b>Memory general: Max. (GB)</b>               | 5    |
| <b>Storage: Std.</b>                           | SSD  |
| <b>Storage: Opt.</b>                           | SSD  |
| <b>SSD capacity: Std. (GB)</b>                 | 128  |
| <b>SSD capacity: Opt. (GB)</b>                 | 512  |
| <b>Duplex</b>                                  | Std. |
| <b>Power requirements: Frequency Min. (Hz)</b> | 50   |
| <b>Power requirements: Frequency Max. (Hz)</b> | 60   |
| <b>Power consumption (kW)</b>                  | 1.84 |
| <b>Width (mm)</b>                              | 608  |
| <b>Depth (mm)</b>                              | 653  |
| <b>Height (mm)</b>                             | 829  |
| <b>Weight (kg)</b>                             | 77   |
| <b>Power Requirements: voltage Min. (V)</b>    | 200  |
| <b>Power Requirements: voltage Max. (V)</b>    | 240  |

## Fax

|   |                  |
|---|------------------|
| <b>Fax</b>  | Opt.             |
| <b>Compression method</b>                         | MH, MR, MMR,JBIG |
| <b>Communication protocol</b>                     | Super G3, G3     |
| <b>Transmission time (sec.)</b>                   | 2                |
| <b>Modem speed: Min. (bps)</b>                    | 2400             |
| <b>Modem speed: Max. (bps)</b>                    | 33600            |
| <b>Transmission resolution: Std (dpi)</b>         | 203.2 x 97.8 dpi |
| <b>Transmission resolution: Ultra Fine (dpi)</b>  | 406.4 x 391 dpi  |
| <b>Document size: Min.</b>                        | A5               |
| <b>Document size: Max.</b>                        | A3               |
| <b>Memory: Max. (GB)</b>                          | 4                |
| <b>Grey scale (levels)</b>                        | 256              |
| <b>Dial registration: rapid/speed dial</b>        | 2000             |
| <b>Broadcast transmission (Max. destinations)</b> | 500              |

## Wireless Lan

|                             |   |
|-----------------------------|---|
| <b>Wireless LAN</b>         | Opt.  |
| <b>Compliant regulation</b> | IEEE802.11a/ac/b/g/n  |
| <b>Access mode</b>          | Infrastructure mode, Software AP mode   |
| <b>Security</b>             | WEP, WPA/WPA2-mixed PSK, WPA/WPA2-mixed EAP, WPA2 PSK, WPA2 EAP, WPA2 EAP/WPA3-mixed, PSK/SAE, WPA3 SAE, WPA2/WPA3-mixed, EAP, WPA3 EAP |

## Print

|                           |   |
|---------------------------|---|
| <b>Network printer</b>    | Std.  |
| <b>Resolution (dpi)</b>   | 1200 x 1200, 600 x 600, 9600 x 600  |
| <b>Interface: Std.</b>    | USB 2.0, USB 3.0, 10Base-T, 100Base-TX, 1000Base-T  |
| <b>Supported OS: Std.</b> | Windows 10, Windows 11, Windows Server 2016, Windows Server 2019, Windows Server 2022, Windows Server 2025, Mac OS X 10.15, Mac OS X 11, Mac OS X 12, Mac OS X 13, Mac OS X 14, Mac OS X 15 |
| <b>Network protocols</b>  | TCP/IP (IPv4, IPv6)   |
| <b>Printing protocols</b> | LPR, Raw TCP (port 9100), POP3 (e-mail printing), HTTP, FTP for downloading print files, IPP, SMB, WSD  |

## Available Fonts

80 PCL, 139 PostScript 3

## Copy

|  |                                    |
|--|------------------------------------|
| <b>Original paper size: Max.</b>             | A3                                 |
| <b>First copy out time: Colour (sec.)</b>    | 7.6                                |
| <b>First copy out time: B/W (sec.)</b>       | 6.5                                |
| <b>E-sort</b>                                | Opt.                               |
| <b>Continuous copy (Max. copies)</b>         | 9999                               |
| <b>Scan resolution: B/W (dpi)</b>            | 600 x 600, 600 x 400               |
| <b>Scan resolution: Colour (dpi)</b>         | 600 x 600                          |
| <b>Print resolution (dpi)</b>                | 1200 x 1200, 600 x 600, 9600 x 600 |
| <b>Gradation: Colour (equivalent levels)</b> | 256                                |
| <b>Zoom range: Min. (%)</b>                  | 25                                 |
| <b>Zoom range: Max. (%)</b>                  | 400                                |
| <b>Preset copy ratios</b>                    | 10                                 |
| <b>Scan method</b>                           | Push scan, Pull scan               |

## Scan

|                                   |  |
|-----------------------------------|--|
| <b>Network scanner</b>            | Std.   |
| <b>Push scan resolution (dpi)</b> | 100, 150, 200, 300, 400, 600   |
| <b>Pull scan resolution (dpi)</b> | 75, 100, 150, 200, 300, 400, 600, 50-9600  |
| <b>File formats: Std.</b>         | TIFF, PDF, PDF/A-1a, PDF/A-1b, Encrypted PDF, Compact PDF, JPEG, XPS, Searchable PDF, Microsoft Office (pptx, xlsx, docx), Text (TXT), Rich Text (RTF) |
| <b>Scan destinations</b>          | Desktop, FTP, Email, Network folder, USB   |

## File

|                             |                                     |
|-----------------------------|-------------------------------------|
| <b>Document filing</b>      | Std.                                |
| <b>Stored jobs</b>          | Copy, Print, Scan, Fax transmission |
| <b>Storage folders</b>      | Quick file, Main, Custom            |
| <b>Confidential storage</b> | False                               |

## Finish

|                                       |      |
|---------------------------------------|------|
| <b>Output capacity: Min. (sheets)</b> | 500  |
| <b>Output capacity: Max. (sheets)</b> | 3250 |
| <b>Staple capacity: Max. (sheets)</b> | 65   |
| <b>Saddle stitch</b>                  | Opt. |
| <b>Off-set shifting</b>               | Std. |
| <b>Hole punch</b>                     | Opt. |

## Toner Yield

|                                       |       |
|---------------------------------------|-------|
| <b>Black (pages at 5% coverage)</b>   | 40000 |
| <b>Cyan (pages at 5% coverage)</b>    | 24000 |
| <b>Magenta (pages at 5% coverage)</b> | 24000 |
| <b>Yellow (pages at 5% coverage)</b>  | 24000 |

